


Leguan 265.



265



265

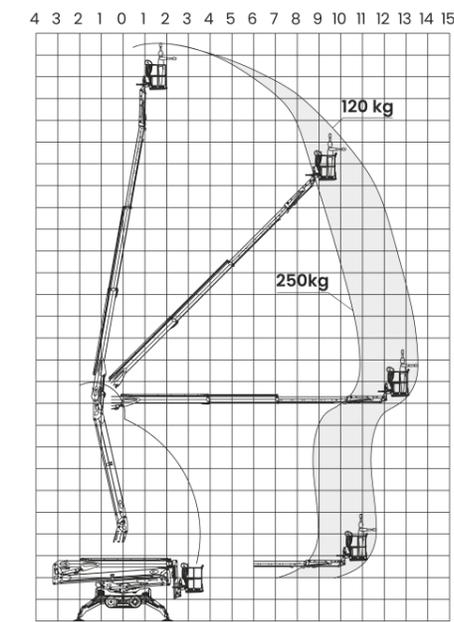


Measurements in millimetres.
*Elevated Driving Position (EDP) maximum values.

Redefining all-terrain performance and efficiency.

THE LEGUAN 265 sets a new benchmark for efficiency and performance in its class. With a working height of 26.5 m, a maximum outreach of 13.6 m, and an up-and-over reach of over 10 m, it provides exceptional access for professionals across industries.

Engineered for versatility, the Leguan 265 features a lightweight design and a compact length, ensuring effortless manoeuvrability in confined spaces. Its rugged track system, unrivalled ground clearance, and the market's lowest centre of gravity provide exceptional stability and mobility, even in the most demanding environments, such as tree care and construction.

Speed and efficiency are at the heart of the Leguan 265. As the fastest 27-meter spider lift in the world, it takes just 1 minute and 35 seconds to fully extend the booms to maximum working height. This unparalleled speed allows operators to complete more projects in less time, driving greater productivity and profitability.

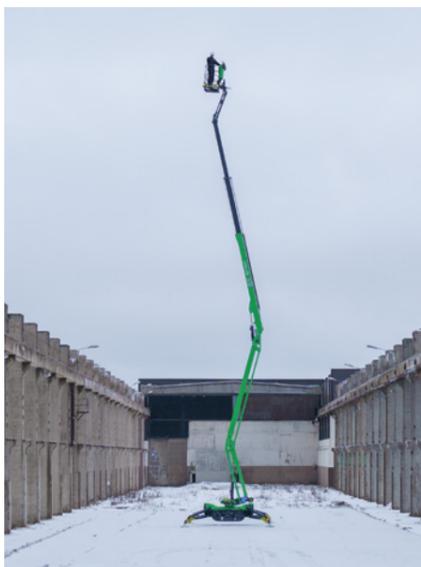

26.5 m
max. working height

13.6 m
max. side reach

250 kg
max. lift capacity

Standard features.

- Leguan EDX
- 21 hp Kubota diesel engine + 230 V electric motor
- 230 V and USB power outlets on platform
- Automatic engine RPM control
- Automatic start-stop function for electric motor
- Automatic levelling of the outriggers
- Proportional outreach monitoring system
- Electric rotation of the platform
- Home / back to work function
- JIB-boom with 120-degree operating range
- Battery powered emergency lowering system
- Lower controls with integrated service display
- Intuitive joystick control
- Elevated Driving Position (EDP)

Optional features.

- Remote control for driving and outriggers
- LED spotlights for platform
- Tool trays on platform
- Outrigger beacons
- Hose to platform (air/water)
- Engine heater
- Non-marking tracks
- Narrow single person platform
- Custom colour

Technical features.

Max. lift capacity	250 kg (2 persons)
Max. working height	26.5 m
Max. platform height	24.5 m
Max. side reach	10.9 m (250 kg) – 13.6 m (120 kg)
Transport dimensions, L x W x H	6.88 x 1.33 x 2.28 m
Platform dimensions	1.33 x 0.75 m
Rotation of the platform	110° (±55°)
Slewing	440°
Gradeability	45 % (25°)
Dimensions w/o platform, L x W	6.24 x 1.25 m
Minimum outrigger support dimensions	4.60 x 4.55 m
Required space for outrigger operation	4.86 x 4.71 m
Max. slope for outriggers	23 % (13°)
Weight	3,920 kg
Engine	Kubota 21 hp diesel or 230 V / 2.2 kW electric
Drive system: hydraulic	tracks
Max. drive speed	3.1 km/h