



13,9 m (120 Kg) / 12,3 m (200 Kg)




11,9 m (120 Kg) / 10,3 m (200 Kg)



6,4 m (120 Kg) / 5,7 m (200 Kg)



300°



Asportabile, alluminio, 1400x700xh1100 mm
Removable, aluminium, 1400x700xh1100 mm
Démontable, aluminium, 1400x700xh1100 mm
Aluminium, 1400x700xh1100 mm
Abnehmbar, alu, 1400x700xh1100 mm
Aluminium, 1400x700xh1100 mm
Aluminium, 1400x700xh1100 mm
СЪЕМНАЯ - 1400x700x1100 мм АЛЮМИНИЕВАЯ



Idraulici
Hydraulic
Hydrauliques
Hidráulico
Hydraulisch
Hydraulisch
Hydraulisk
ГИДРАВЛИЧЕСКОЕ



120 Kg - 1 operatore / 200 Kg - 2 operatori
120 Kg - 1 operator / 200 Kg - 2 operators
120 Kg - 1 opérateur / 200 Kg - 2 opérateurs
120 Kg - 1 operario / 200 Kg - 2 operarios
120 Kg - 1 bediener / 200 Kg - 2 bediener
120 Kg - 1 personen / 200 Kg - 2 personen
120 Kg - 1 operatör / 200 Kg - 2 operatörer
120Kg кг - 1 ЧЕЛОВЕК / 200Kg кг - 2 ЧЕЛОВЕКА



1960 mm



4000 mm



780 mm



Ribaltabili a discesa idraulica
Collapsible, hydraulic descent
Escamotables à descente hydraulique
Replegables de bajada hidráulica
klappbar mit hydraulisch absenken
hydraulisch uitvouwbare stempelpoten
sammenklappelig, hydraulisk sænkning
СЛАДЫВАЮЩИЕСЯ, ГИДРАВЛИЧЕСКОЕ ОПУСКАНИЕ






Honda monocilindrico silenzioso/elettrico 220V
Single-cylinder noiseless honda/electric 220V
Honda monocylindrique avec silencieux/électrique 220V
Honda monocilindrica silenciada/eléctrica 220V
geräuschloser einzylindermotor, honda
geluidsarm honda/elektrische 220v
et-cylindret stöjsvag honda/elektrisk 220v
ОДНОЦИЛИНДРОВЫЙ БЕЗШУМНЫЙ ЭЛЕКТРИЧЕСКИЙ 220В



Cingolata 1,5 km/h
Tracked 1,5 km/h
Sue chenilles 1,5 km/h
Oruga 1,5 km/h
raupen / 1,5 km/h
rups / 1,5 km/h
bæltedrevet / 1,5 km/h
ГУСЕНИЧНОЕ / 1,5 км/ч



1630 kg

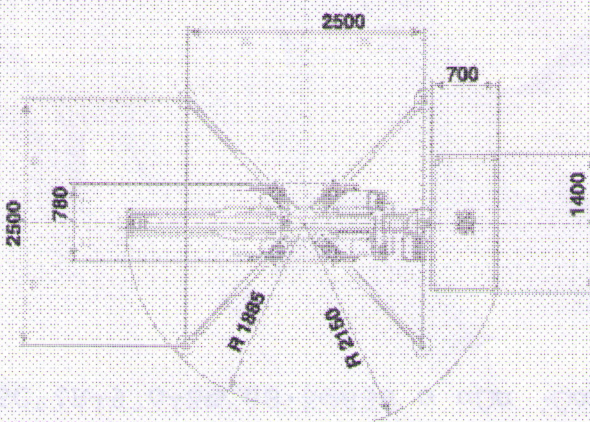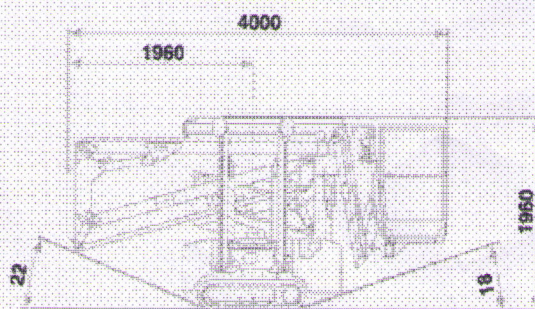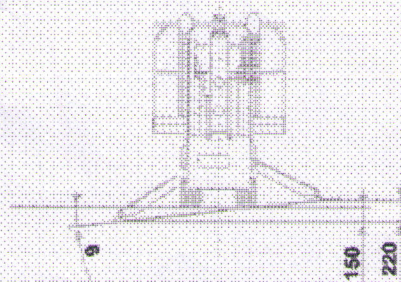

OIL & STEEL